

EFL303

LI-ION COUNTERBALANCE FORKLIFT 3.0T

 3000 kg  6000 mm  80 V Li-Ion



Designed for warehouses, manufacturing sites, and logistics hubs, the EFL303 excels in applications requiring both indoor maneuverability and outdoor durability. From pallet handling to heavy material transport, it performs consistently in diverse conditions, offering reliability and operator comfort in every shift.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity		Ah	205
Battery voltage		V	80
Load capacity	Q	kg	3000
Load centre distance	c	mm	500
Service weight		kg	4280
Retracted mast height	h ₁	mm	2070
Lift height	h ₃	mm	3000
Height, mast extended	h ₄	mm	4095
Overall length		mm	3610
Overall width	b ₁ /b ₂	mm	1210
Length to face of forks	l ₂	mm	2540
Fork dimensions	s/e/l	mm	45X122X1070
Turning radius		Wa	2347
Operator type			Seated
Load distance, centre of drive axle to fork		mm	481

Features

Higher performance for productivity boost

Max travel speed 19/20km/h to cover diverse intralogistics application needs.

Max battery capacity 80V/560Ah and max charging current 200A for longer uptime and fast charging.

Max gradeability 22/28% to deliver better stability on ramps.

Max lifting speed 0.48/0.54m/s for greater efficiency.



The truck structure integrates aesthetics and practical design

Both practicality and beauty are reflected in the design of the new EFL series. It inherits the robust chassis of the T8 IC truck series and features a more streamlined and compact counterweight, to better fit in confined space. Plus, the rain-proofed charging port protects the port from water splash and ensures charging safety.


Lithium technology to replace internal combustion engine

The lithium technology has proven itself as an emission-free and maintenance-free alternative to diesel. The new generation of EFL series handles loads with consistently high performance due to opportunity charging even for the most demanding applications.




Multi-functions for safe operation and easy fleet management

The new EFL series is equipped with a variety of functional configurations, such as OPS system, Telematics and card system, which not only takes security as priority but also

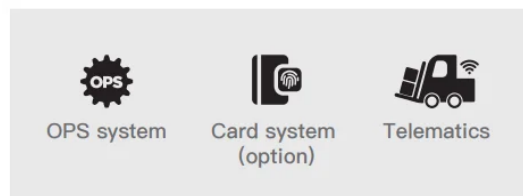


Ergonomic improvements for comfortable operation

The workspace of the new EFL series is more spacious with a simplified panel and a comfortable pedal. The series features a new LED display that clearly shows speed, working hours, battery status ,milage and parking status so the operator can easily grapse the truck conditions just with a glance

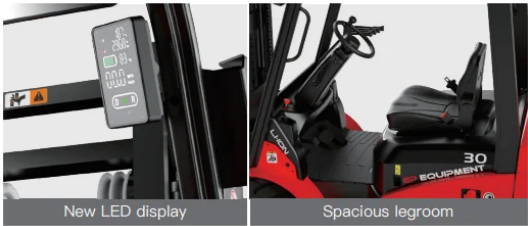

Outdoor behavior with high-visibility closed roof and cabin options

The bolted overhead guard is fitted as standard with a new closed roof made of tempered glass and flat high-strength steel bars, offering the highest visibility in the category. It enables safe load handling at all heights and increases productivity by increasing the number of pallet movements. Outdoor performance can be enhanced with cabin options such as front windshield, semi-cab, full cabin, heater and A/C. For added flexibility, the front windshield and semi cabin can be offered in a retrofit kit for easy installation by dealers.

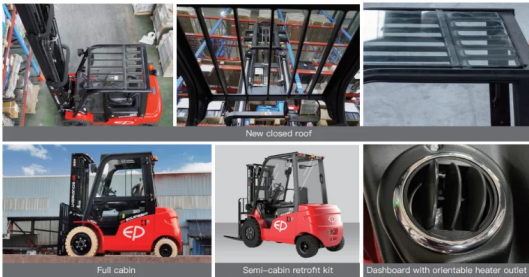


VDI Chart

SPECIFICATION		REF	UNIT	VALUE
1.4	Operator type			Seated
1.5	Load capacity	Q	kg	3000
1.6	Load centre distance	c	mm	500
1.8	Load distance, centre of drive axle to fork		mm	481
1.9	Wheelbase		mm	1740
2.1	Service weight		kg	4280
2.2	Axle loading, laden front/rear		kg	6595/685
2.3	Axle loading, unladen front/rear		kg	1900/2380
3.1	Tyre type			Solidrubber
3.2	Tyre size, front		mm	28x9-15
3.3	Tyre size, rear		mm	200/50-10
3.5	Wheels, number front/rear (x=drive wheels)			2X-2
3.6.1	Tread width, front	b ₁₀	mm	1010

SPECIFICATION		REF	UNIT	VALUE
3.7.1	Tread width, rear	b ₁₁	mm	955
4.0	Max lift height	H	mm	6000
4.1	Tilt of mast/fork carriage forward/backward		°	6/10
4.12	Tow coupling height		mm	345
4.13	Loading height, unladen			1110
4.15	Lowered height			2070
4.19	Overall length		mm	3610
4.2	Retracted mast height	h ₁	mm	2070
4.2.1	Overall height			4095
4.20	Length to face of forks	l ₂	mm	2540
4.21	Overall width	b ₁ /b ₂	mm	1210
4.22	Fork dimensions	s/e/l	mm	45X122X1070
4.23	A,B Fork carriage class/type A, B			3A
4.24	Fork carriage width		mm	1100
4.3	Free lift		mm	135
4.31	Ground clearance, laden, below mast		mm	130
4.32	Ground clearance, centre of wheelbase		mm	185
4.34.1	Aisle width for pallets 1000×1200 crossways		Ast	4028
4.34.2	Aisle width for pallets 800×1200 lengthways		Ast	4228
4.35	Turning radius		Wa	2347
4.36	Internal turning radius			2347
4.4	Lift height	h ₃	mm	3000
4.5	Height, mast extended	h ₄	mm	4095
4.7	Height of overhead guard (cabin)		mm	2180
4.8	Seat height/standing height		mm	1110
5.1	Travel speed, laden/unladen		km/h	11/12
5.10	Service brake			Hydraulic
5.11	Parking brake			Mechanical
5.2	Lifting speed, laden/unladen		m/s	0.29/0.36
5.3	Lowering speed, laden/unladen		m/s	0.43/0.44
5.8	Max. gradeability, laden/unladen		%	15/15
6.1	Drive motor rating S2 60 min		kW	10
6.2	Lift motor rating at S3 15%		kW	16
6.4	Battery nominal capacity		Ah	205
6.4	Battery voltage		V	80

	SPECIFICATION	REF	UNIT	VALUE
6.4.1	Battery type			Li-Ion
6.6	Energy consumption according to DIN EN 16796		kWh/h	7.15
6.7	Turnover output according to VDI 2198			180
6.8	Turnover efficiency according to VDI 2198			28.57
8.1	Type of drive control			AC
10.5	Steering design			Hydraulic
10.7	Sound pressure level at the drivers ear		dB(A)	<74


VDI Drawing

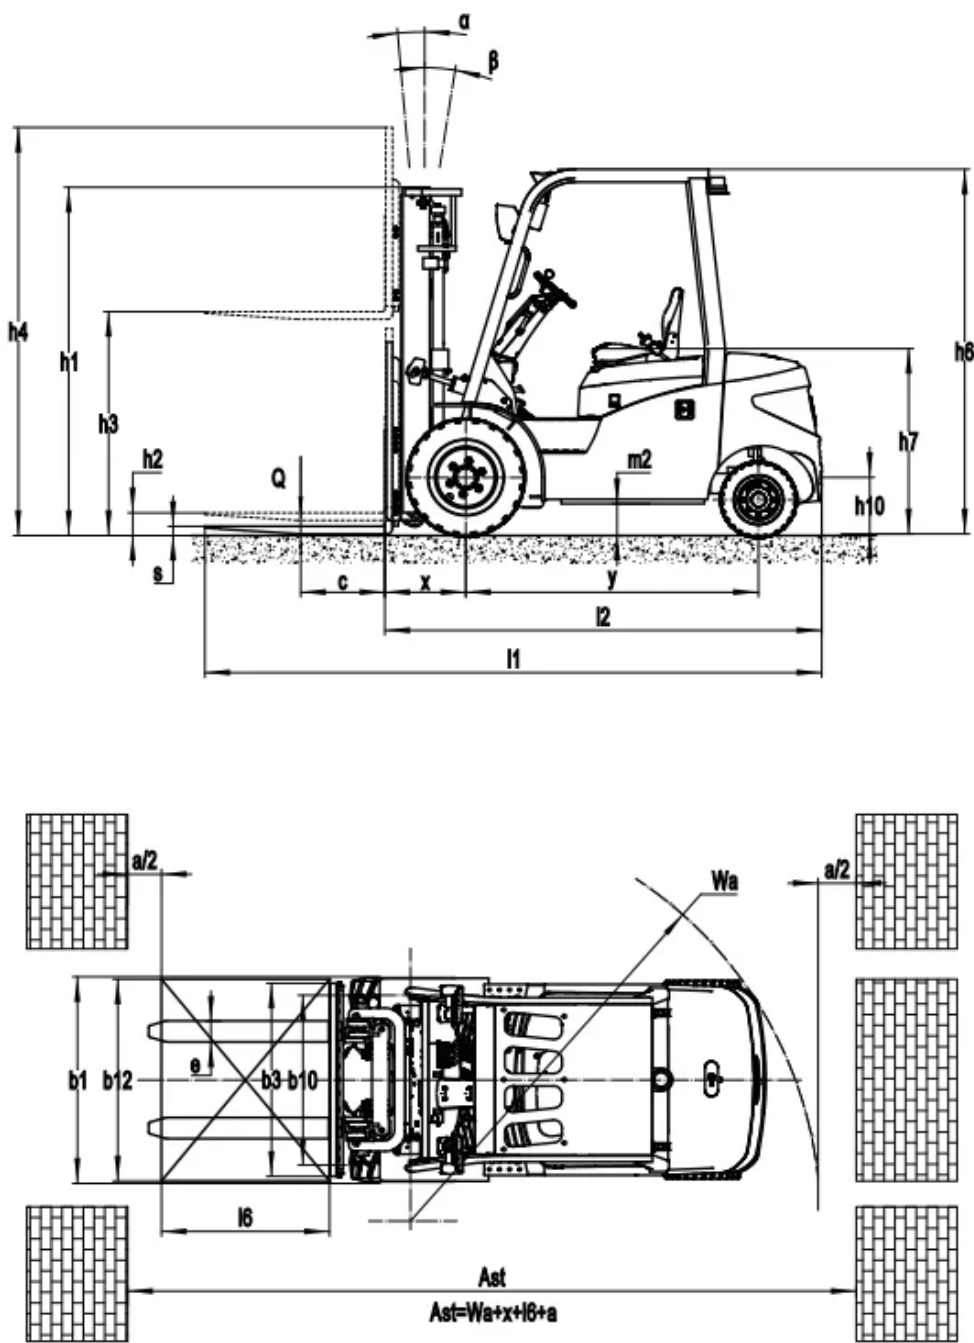

EFL303(S, P)

RATED CAPACITIES AND LOAD CENTERES GRAPH

SUBTRACT 100Kg WITH SIDE SHIFTER

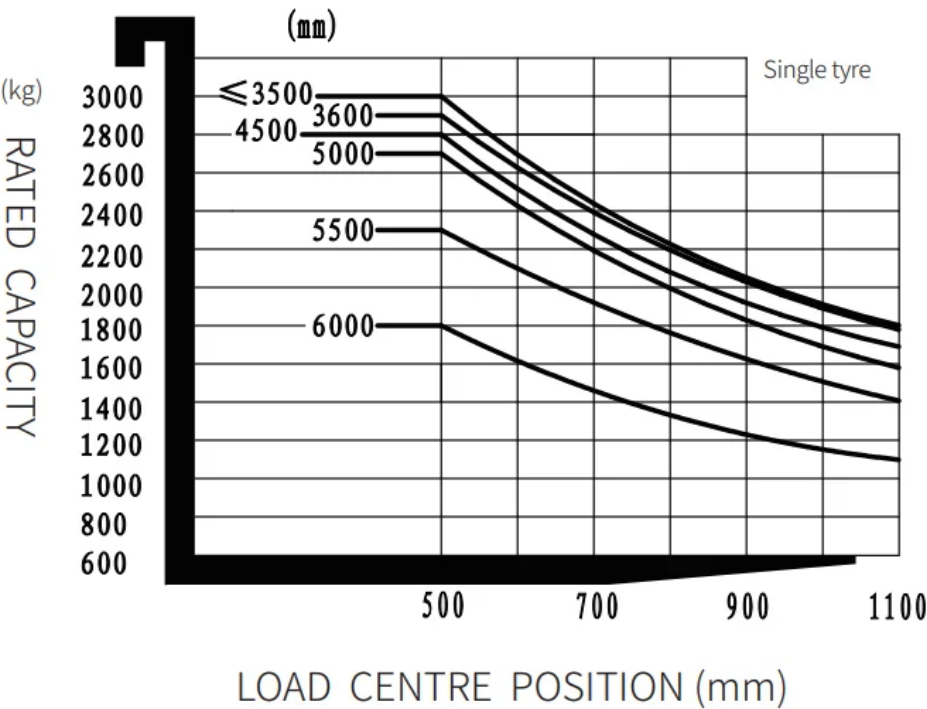

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	HEIGHT, MAST EXTENDED, NO SHELVING (H4, MM)	HEIGHT, MAST EXTENDED, WITH SHELVING (H4, MM)	HEIGHT, FREE LIFT, NO SHELVING (H2, MM)	HEIGHT, FREE LIFT, WITH SHELVING (H2, MM)	LOAD DISTANCE OF DRIVE AXLE TO FORK (MM)	FORWARD TILT (A, DEG)	BACKWARD TILT (B, MM)	LOAD CAPACITY, SINGLE TYRE (KG)	LOAD CAPACITY, DOUBLE TYRE (KG)
2W270	2700	1920	3330	3795	135	135	481	6	10	3000	-
2W300	3000	2070	3630	4095	135	135	481	6	10	3000	-
2W330	3300	2220	3930	4395	135	135	481	6	10	3000	-
2W350	3500	2320	4130	4595	135	135	481	6	10	3000	-
2W360	3600	2370	4230	4695	135	135	481	6	10	2900	-
2W400	4000	2620	4630	5095	135	135	481	6	10	2800	-
2W450	4500	2870	5130	5595	135	135	481	6	6	2600	-
2F300	3000	2040	3630	4095	1410	945	481	6	10	3000	-

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	HEIGHT, MAST EXTENDED, NO SHELVING (H4, MM)	HEIGHT, MAST EXTENDED, WITH SHELVING (H4, MM)	HEIGHT, FREE LIFT, NO SHELVING (H2, MM)	HEIGHT, FREE LIFT, WITH SHELVING (H2, MM)	LOAD DISTANCE CENTRE OF DRIVE AXLE TO FORK (MM)	FORWARD TILT (A, DEG)	BACKWARD TILT (B, MM)	LOAD CAPACITY, SINGLE TYRE (KG)	LOAD CAPACITY, DOUBLE TYRE (KG)
2F330	3300	2190	3930	4395	1560	1095	481	6	10	3000	-
2F360	3600	2340	4230	4695	1710	1245	481	6	10	2900	-
3F430	4300	2040	4930	5395	1410	945	495	6	6	2900	-
3F450	4500	2120	5130	5595	1490	1025	495	6	6	2800	-
3F480	4800	2190	5430	5895	1560	1095	495	6	6	2750	-
3F500	5000	2310	5630	6095	1680	1215	495	6	6	2750	-
3F550	5500	2560	6130	6595	1930	1465	495	3	5	2300	-
3F600	6000	2810	6630	7095	2180	1715	495	3	5	1800	-

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	122*45*1070 122*45*1150 122*45*1220 122*45*1370 122*45*1520 122*45*1600 122*45*1700 122*45*1820 122*45*2000 122*45*2200 122*45*2400
Fork carriage width option	1100mm Yes and can be customized
Fork carriage height option	1095mm Yes and can be customized
Seat type	Regular Premium Suspension Suspension + seatbelt logic switch Suspension seat with armrest
Attachments	No Built-in sideshifter External shifter Fork positioner
Traction pin	Yes
Electrostatic chain	Yes
Battery and charger with heating function	No Yes and not customized
Front wheel type	Single Double
Front wheel material	Pneumatic Solid Non-marking
Rear wheel material	Solid Non-marking
Battery capacity	80V205AH 80V280AH 80V410AH 80V460AH

ITEM	OPTIONS (optional items marked in yellow)
Charger	80V35A external 80V65A external 80V60A external 80V100A external 80V130A external 80V150A external 80V200A external 80V35A integrated 80V60A integrated
Battery display indicator (BDI)	With time
Area warning lamp	No Red, 1 left + 1 right
Rearview mirror	1 rearview mirror Add rearview mirror on both sides
Buzzer	Yes
OPS system	No Yes and not customized
USB interface	Yes
Telematics	Yes and not customized No
Front lamp	LED
Rear lamp	LED No
Warning lamp	Yes
Steering lamp	Yes
Blue lamp	No 2 front 1 rear 2 front+1 rear
Cabin	No Basic half cabin Upgrade half cabin Full cabin
Joystick	No
Heater	No Yes and not customized